

CCRS



Thickness
Grader-Super
CCRZi-S

ZACCARIA

CCRZi-S

Thickness Grader-Super CCRZi-S

Zaccaria, in its new generation of high production equipment presents the new Super Thickness Grader model CCRZi-S / CCRZ-S. It has an innovated and modern conception, providing large performance in capacity of production and efficiency at grading.

The principal feature is to increase the capacity of grading, with less space required. It has double of the work capacity of our established CCRZ.

The CCRZ-S was developed with individual modules that allow separating different types and fractions of the product. For example, in rice, it allows the separating: chalky rice, red rice. Its system permits a double pass of the same product (for example, double pass for removing chalky rice).

Model:

CCRZi-S / CCRZ-S

Power / poles (each Cylinder):

0,55 kW / IV

0,75 hp / IV

MTVZ-S: Vibratory conveyor unit

1,1 kW / VI

1,5 hp / VI

Inlet Capacity (kg/h):

Grading red rice:
up to 3.600 (per cylinder)

Grading chalky rice or broken grains:
up to 3.000 (per cylinder)

MTVZi-S / MTVZ-S:

up to 20.000 (kg/h)




Model: CCRZ-S
Made in painted carbon steel

FEATURES

- Cylindrical Screens built in STAINLESS STEEL
- It is driven by independent gearmotors
- Closed equipment: providing more safety
- Assembled in Modular System
- Auto Cleaning System: It has an exclusive and efficient system composed by robber rolls to clean the Cylinders
- Metallic structure – Base (optional)
- The STAINLESS STEEL Line MCCRZi-S: It is built in noble material, the innovated and cleanest visual provided through the STAINLESS STEEL. Every parts of the equipment in contact with the product are made in STAINLESS STEEL, and it also includes an amazing external appearance.

ADVANTAGES

- High efficiency at grading
- Large capacity of production
- Easiest replacement of the cylinders
- In grain processing, it may be used in several steps
- Low power consumption

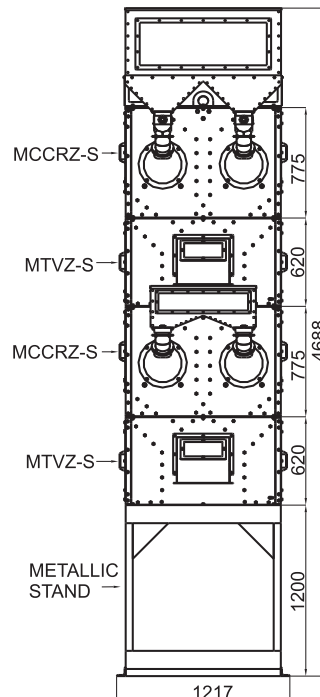

- Lay-out according to the CCRZ-S-2x2 assembly, determined for each customer requirement;
- Approximate weight of the units (kg):
MCCRZ-S: 340
MTVZ-S: 375
- Approximated Shipping Volume of the units (M³):
MCCRZ-S: 3,50
MTVZ-S: 2,90
- Length: 2.900 mm
- Measures in mm



OUR EXPERIENCE MAKES THE DIFFERENCE

INDÚSTRIAS MACHINA ZACCARIA S/A

Rua Laranjal, 180

CEP: 13484-016 - Limeira - SP - Brasil

Phone: (55.19) 3404-5745

www.zaccaria.com.br

comex@zaccaria.com.br



NOTE: - Production capacity in kg/h, based in tests made using Brazilian long rice type.

- The rice moisture recommended to obtain the best yield is between 12 and 13% (B. U.)

- For other types of grains, under consult.

- Equipment with motor.

Indústrias Machina Zaccaria S/A reserves the right to change the information stated in this catalogue, including the color and other details of the machine, without previous notice.